

BRITOSTEROPE

HEAVY RECTANGULAR STYLE

CHARACTERISTICS

Repeats the design of the Sterope but with components of greater section which makes it the most robust model in the series.

APPLICATIONS

Where safety, strength, and anti-break-in characteristics are required such as military installations, radar stations, petrochemical, industrial, residential, and sports facilities.


COATING

Hot-dip galvanized in accordance with ATMS-123.

Finish Coating:

- Hot-dip galvanized and/or powder polyester coated.

SCALE 1:20

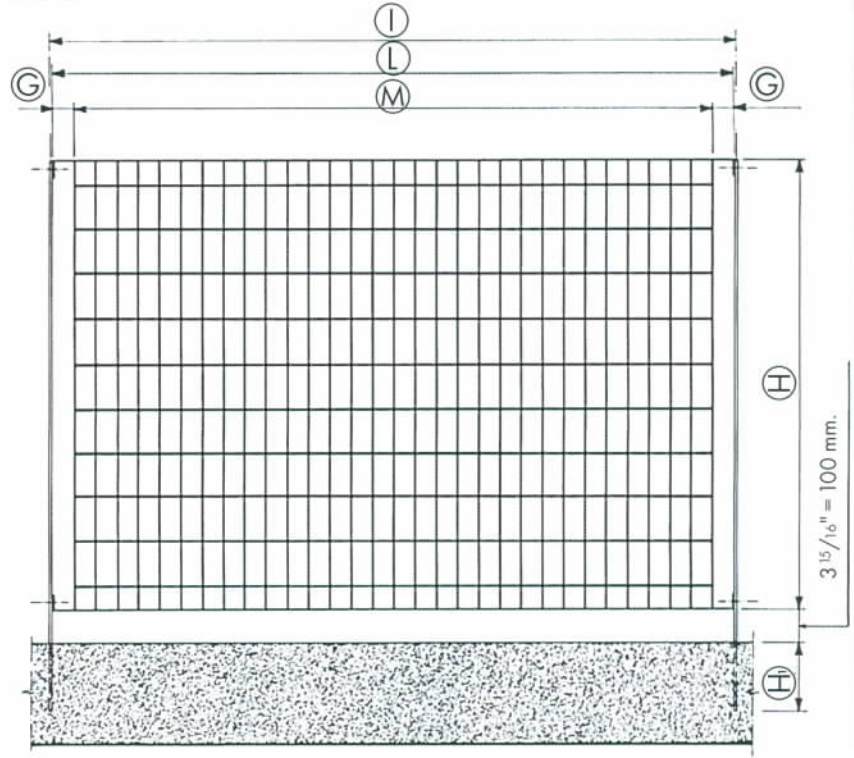

These are the standard size panels. A&T Iron Works, Inc. can custom fabricate any size or configuration you require.

Ⓜ PANEL HEIGHT		Ⓜ ANCHORAGE LENGTH		POST SIZE		WEIGHT	
inches	mm.	inches	mm.	inches	mm.	Approximate weight of panel only = 4.5 lbs./sq.ft. = 22 kg/m ² (The weight will slightly vary depending on the type of finish.)	
36 5/8"	930	7 7/8"	200	2 3/8" x 5/16"	60 x 8		
52 7/32"	1326	7 7/8"	200	2 3/8" x 5/16"	60 x 8		
67 25/32"	1722	7 7/8"	250	2 3/8" x 5/16"	60 x 8		
83 3/8"	2118	9 27/32"	300	2 3/8" x 5/16"	60 x 8		
98 31/32"	2514	11 13/16"	350	2 3/8" x 5/16"	60 x 8		

Ⓛ WIDTH (POST CENTERS)		Ⓛ PANEL WIDTH		Ⓜ WIDTH OF GRILL		Ⓜ LUG PROJECTION	
inches	mm.	inches	mm.	inches	mm.	inches	mm.
78 3/4"	2000	78 7/16"	1992	73 3/8"	1864	2 17/32"	64.0
64 31/32"	1650	64 21/32"	1642	61 3/16"	1554	1 23/32"	44.0
52 3/4"	1340	52 7/16"	1332	48 31/32"	1244	1 23/32"	44.0
35 5/8"	905	35 5/16"	897	31 7/8"	810	1 23/32"	44.0
28 11/32"	720	28 1/32"	712	24 9/16"	624	1 23/32"	44.0
21 1/16"	535	20 3/4"	527	17 1/4"	438	1 3/4"	44.5

The measurements given are theoretical and subject to the normal work tolerances.



ORSOGRIL®
Manufacturer

Architectural
Ornamental
Structural
Steel

**Certified
WBE & DBE**