


STEROPE®

RECTANGULAR STYLE

STEROPE

RECTANGULAR STYLE

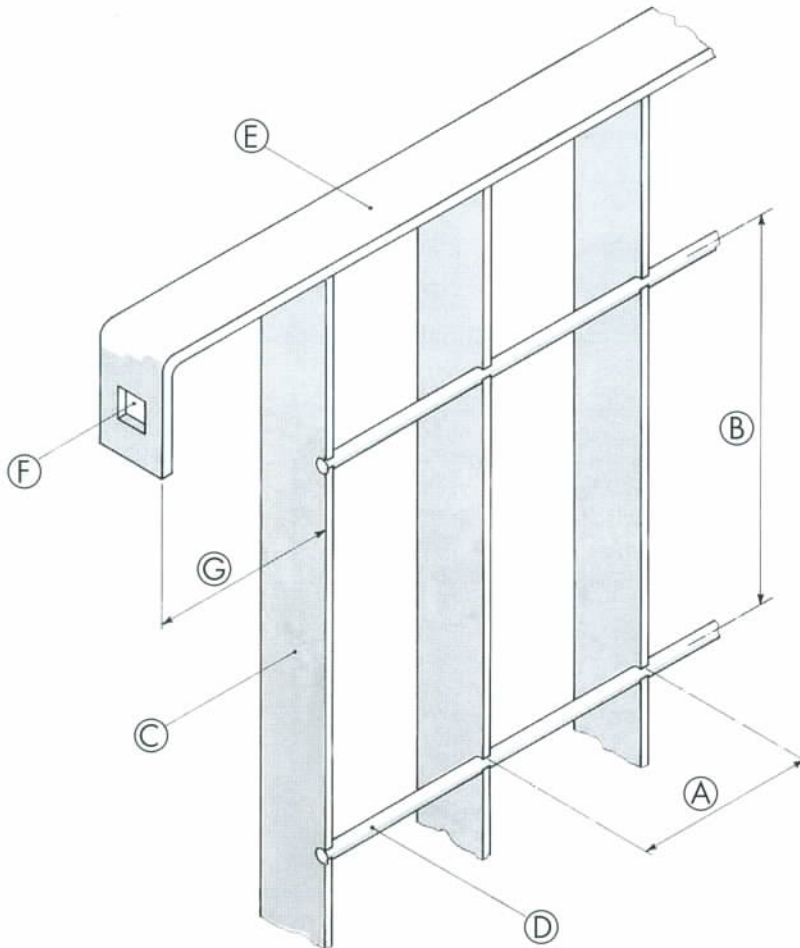

(A) = $2\frac{7}{16}$ "
= 62 mm.

spacing of vertical sections

(B) = $5\frac{3}{16}$ "
= 132 mm.

spacing of horizontal ties

(C) = $3\frac{1}{32}$ " x $\frac{1}{8}$ "
= 25 x 3 mm.

vertical section measurements

(D) = $\frac{3}{16}$ " ϕ
= 5 mm. ϕ

horizontal tie


(E) = $3\frac{1}{32}$ " x $5\frac{5}{32}$ "
= 25 x 4 (mm.)

framing bar
 $3\frac{1}{32}$ " x $\frac{1}{8}$ " = 25 x 3 (mm.) for
adjustment panels
welded by electrofusion without
additional weld material

(F) = $\frac{7}{16}$ " \square
= 11.2 mm \square

hole

(G)
projection of lead flange
(see table on back)

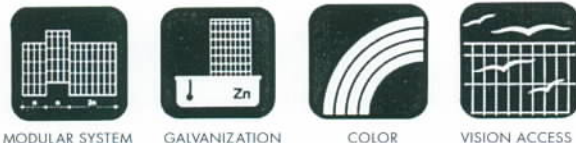

MATERIAL: STEEL ASTM A-36

STEROPE®



25 Cliff Street

New Rochelle

NY 10801-1603

1-800-523-0973

914-632-8992

Fax 914-632-2645

E-mail: info@atironworks.com

Website: atironworks.com