

TALIA

LOUVER STYLE

CHARACTERISTICS

This model is built with inclined sections, exclusive polished materials, without cuts or joints and constructed monolithically. It can be installed horizontally which makes it peek-proof. The vertical application allows a reduced side visibility.

APPLICATIONS

Suitable for use on balconies, as sunscreens, protective screens, false ceilings, ventilation openings, and special applications.


COATING

Hot-dip galvanized in accordance with ATMS-123.

Finish Coating:

- Hot-dip galvanized and/or powder polyester coated.

SCALE 1:20

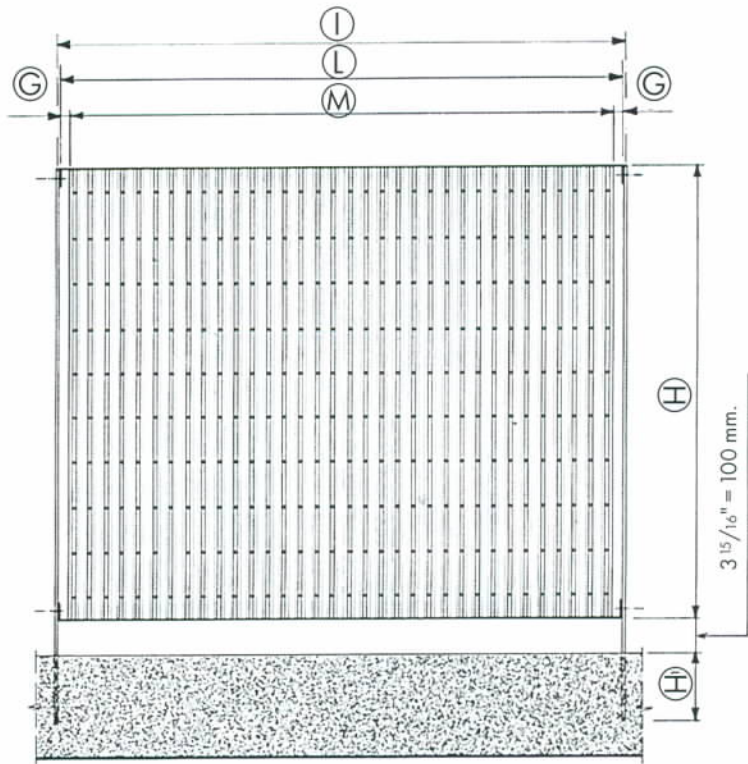

These are the standard size panels. A&T Iron Works, Inc. can custom fabricate any size or configuration you require.

Ⓜ PANEL HEIGHT		Ⓜ ANCHORAGE LENGTH		POST SIZE		WEIGHT
inches	mm.	inches	mm.	inches	mm.	
36 5/8"	930	7 7/8"	200	2 3/8" x 5/16"	60 x 8	Approximate weight of panel only = 4.05 lbs./sq.ft. = 19.8 kg/m ² (The weight will slightly vary depending on the type of finish.)
52 7/32"	1326	7 7/8"	200	2 3/8" x 5/16"	60 x 8	
67 25/32"	1722	7 7/8"	200	2 3/8" x 5/16"	60 x 8	
62 3/8" **	1584 **	7 7/8"	200	2 3/8" x 5/16"	60 x 8	

Ⓛ WIDTH (POST CENTERS)		Ⓛ PANEL WIDTH		Ⓜ WIDTH OF GRILL		Ⓜ LUG PROJECTION	
inches	mm.	inches	mm.	inches	mm.	inches	mm.
64 31/32"	1650	64 21/32"	1642	62 3/8"	1584	1 5/32"	29.0
52 3/4"	1340	58 7/16"	1332	49 11/16"	1262	1 3/8"	35.0
35 5/8"	905	35 5/16"	897	33 3/8"	848	31/32"	24.5
28 11/32"	720	28 1/32"	712	26 5/32"	664	15/16"	24.0
21 1/16"	535	20 3/4"	527	18 29/32"	480	15/16"	23.5
64 31/32" *	1650 *	64 21/32" *	1642 *	64 21/32" *	1642 *	-	-

The measurements given are theoretical and subject to the normal work tolerances.

(*) Installed horizontal.



ORSOGRIL®
Manufacturer

Architectural
Ornamental
Structural
Steel

Certified
WBE & DBE